

TYPICAL TOWN STANDARD - LUMINAIRE SPECIFICATIONS

CYCLONE "HYSTORIA" LUMINARIES

CATALOG NO.:

CY25T4B-FGC-3-40W-4K-120-PX-CP4864-BKTX

GLOBE MAT'L: NO GLOBE

IES CLASSIFIC: TYPE 3

WATTAGE: 40

LIGHT SOURCE: LED - 4000K (WHITE)

LINE VOLTAGE: 120 AT 277 VOLTS

DRIVER: AUTO ADJUSTABLE TOOL FREE REMOVABLE TRAY WITH QUICK CONNECTORS.

MOUNTING HARDWARE: SQUARE HEAD BOLTS

PHOTO CELL: TWIST LOCK TYPE. 120 VOLTS. INSTALLED IN
FITTER - PX IF SHORTING CAP IS USED



SIDE VIEW

4"Ø x 3" TENON

15A, 120 V, GFI RECEPTACLE WITH WEATHER PROOF COVER FACING AWAY FROM TRAFFIC FLOW WIRED INLINE FROM SHORTING CAP TO ENSURE POWERED WHEN LIGHT IS ON

11 GA., 6 3/16" BASE DIA.,
GALVANIZED STEEL FLUTED TAPERED POLE
0.14"/FT. TAPER, VI-A20-F/19'
(NVE CODE #28-1108)

PAINT SPECIFICATION

ALL CAST IRON AND STEEL LIGHT POLE PARTS
ARE TO BE FACTORY POWDER COATED "BLACK".

—APPLY SILICONE SEALANT
AT INSTALLATION

A20 VERTICALLY SPLIT BASE
WITH REMOVABLE ACCESS DOOR
(NVE CODE# 28-0130)

20"Ø

N9 BOX - JUNCTION BOX
FOR POLE ELECTRICITY:


1" POLYETHYLENE PIPE
PULL BOX TO LIGHT

2" CONDUIT PULL BOX
TO PULL BOX

16"øx42" TALL PVC TUBE, FILLED WITH
3/4" MINUS GRAVEL, COMPACTED,
COMPACT TYPE II BASE BETWEEN NATIVE
EARTH HOLE AND SONOTUBE OR
APPROVED SIMILAR

3'-0" 
(DIRECT BURIAL)

MANUFACTURE

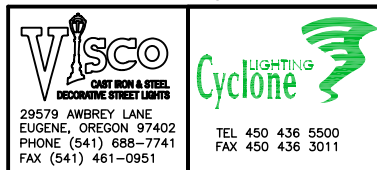

DISTRIBUTOR



TOWN OF GARDNERVILLE

TOWN
DECORATIVE LIGHT

SECTION:

DATE: 01/2020

DWG: TOG-04